


	Ref.	A	B	C	White & Colors		Chrome		Weight	Cap.	Recommended Resistances				
					Δt=50°C	Δt=30°C	Δt=50°C	Δt=30°C			Erforderliche Widerstände				
											Résistances Conseillées				
		mm	mm	mm	W	W	W	W	kg	Lt	Resistencias Recomendadas				
											300W	500W	750W	1000W	
770 18 pipes Rohre tubes tubos	CA077045	770	450	400	369	198	247	132	6,5	3,6	●	x			
	CA077050	770	500	450	405	217	271	146	7,0	3,9	●	x			
	CA077055	770	550	500	441	237	295	159	7,6	4,2	x		●		
	CA077060	770	600	550	478	257	320	172	8,2	4,5	x		●		
	CA077100	770	1000	950	769	421	515	282	12,9	6,9		x		●	
1200 27 pipes Rohre tubes tubos	CA120045	1177	450	400	545	291	365	195	9,8	5,5	x		●		
	CA120050	1177	500	450	600	321	402	215	10,7	6,0	x		●		
	CA120055	1177	550	500	655	351	439	235	11,6	6,4	x			●	
	CA120060	1177	600	550	709	381	475	255	12,4	6,9		x		●	
	CA120075	1177	750	750	877	473	586	317	15,0	8,2		x		●	
	CA120100	1177	1000	950	1149	628	770	421	19,4	10,5			x		●
1500 34 pipes Rohre tubes tubos	CA150045	1510	450	400	698	375	468	251	13,1	7,3	x		●		
	CA150050	1510	500	450	767	413	514	277	14,3	7,9		x		●	
	CA150055	1510	550	500	835	451	559	302	15,5	8,5		x		●	
	CA150060	1510	600	550	904	489	606	328	16,6	9,2		x		●	
	CA150075	1510	750	700	1111	605	747	405	20,2	11,0		x		●	
	CA150100	1510	1000	950	1455	801	975	537	26,2	14,1			x		●
1800 42 pipes Rohre tubes tubos	CA181045	1806	450	400	843	451	565	302	15,1	8,5		x		●	
	CA181050	1806	500	450	923	495	618	332	16,5	9,2		x		●	
	CA181055	1806	550	500	1003	539	672	361	17,8	9,9		x		●	
	CA181060	1806	600	550	1084	584	726	391	19,2	10,6			x		●
	CA181075	1806	750	700	1325	719	888	482	23,2	12,7			x		●
	CA181100	1806	1000	950	1727	950	1157	636	30,0	16,2					● x

kcal/h = 0,86 x Watt

● White & Color
x Chrome


Wall fastening systems

Befestigungssysteme an der Wand
Systèmes d'installation murale
Sistemas de fijación a la pared




Radiator body dimensions

Größe des Heizkörpers
Dimensions du corps chauffant
Dimensiones del cuerpo calefactor



Installation with heating element and "T"

Installation gemischter Ausführung mit "T"
Installation avec résistance électrique et "T"
Instalación con resistencia eléctrica y "T"




"T" fitting
T-Stück
Raccord en "T"
Conexión en "T"

Resistance with thermostat
Widerstand mit Thermostat
Résistance avec thermostat
Resistencia con termostato

Modification of interaxis with "T" fitting
Achsabstandänderung durch T-Stück
Variation interaxe avec raccord "T"
Variación entreje con rācor en "T"

Measures in mm
Maße in mm
Mesures in mm
Medidas in mm

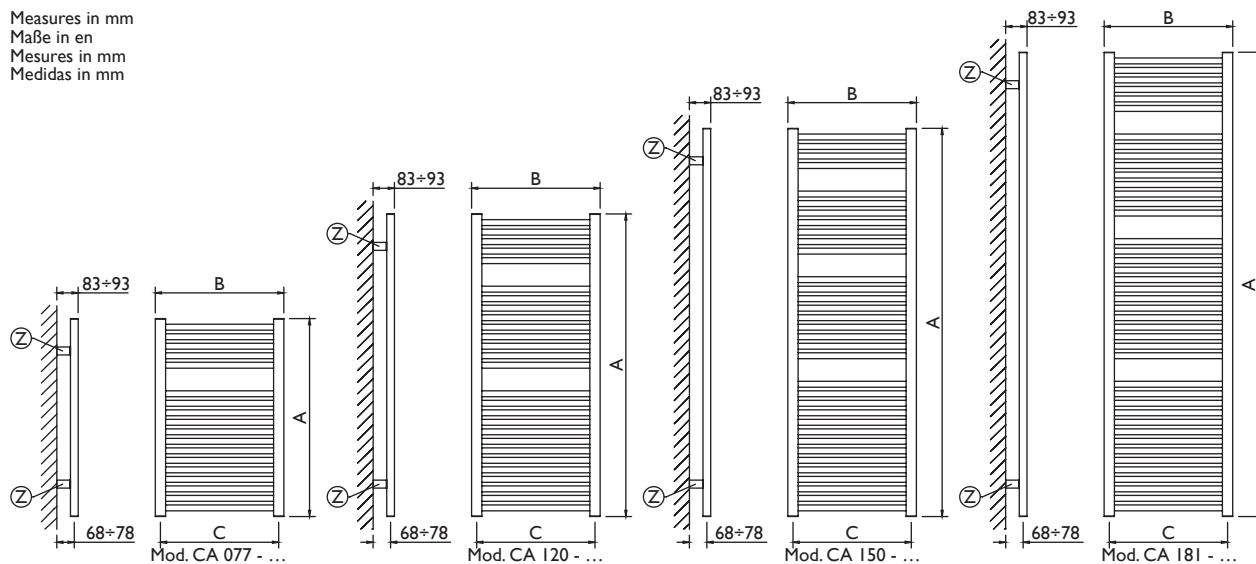

technical notes

Maximum operating temperature: 90 °C

Max. Betriebstemperatur: 90° C

Température maximum de fonctionnement: 90 °C

Temperatura máx de funcionamiento: 90 °C

Maximum operating pressure: 500 kPa

Max. Betriebsdruck: 500 kPa

Pression maximum de fonctionnement: 500 kPa

Presión máx de funcionamiento: 500 kPa



Wall fastening systems are white for "9010" version, chromed for "chrome" & "colors" versions

Die Befestigungselemente sind für die Ausführung "9010" weiß und für Ausführungen "colors" verchromt

Les systèmes d'installation sont blancs pour la version "9010", chromés pour les versions "chrome" & "colors"

Los sistemas de fijación son blancos para la versión "9010", cromados para las versiones "chrome" & "colors"

For single-pipe system contact Deltacolor technical office

Für ein Einrohrsystem wenden Sie sich bitte an die technische Abteilung von Deltacolor

Pour installation monotube consulter le bureau technique Deltacolor

Por instalación monotubo consultar con el departamento técnico Deltacolor